

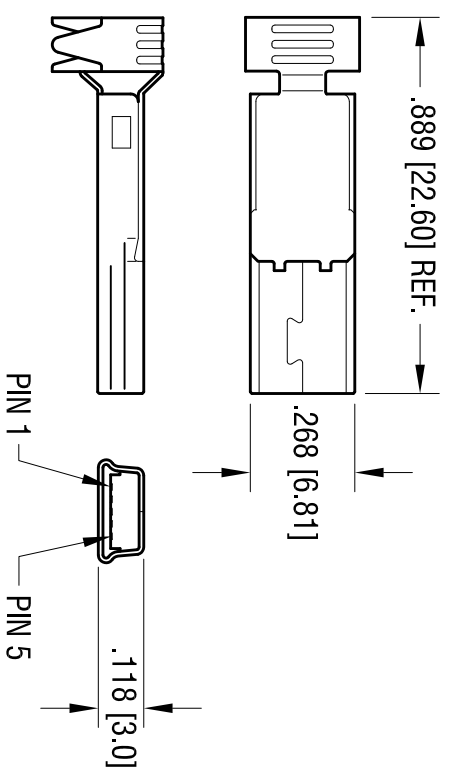
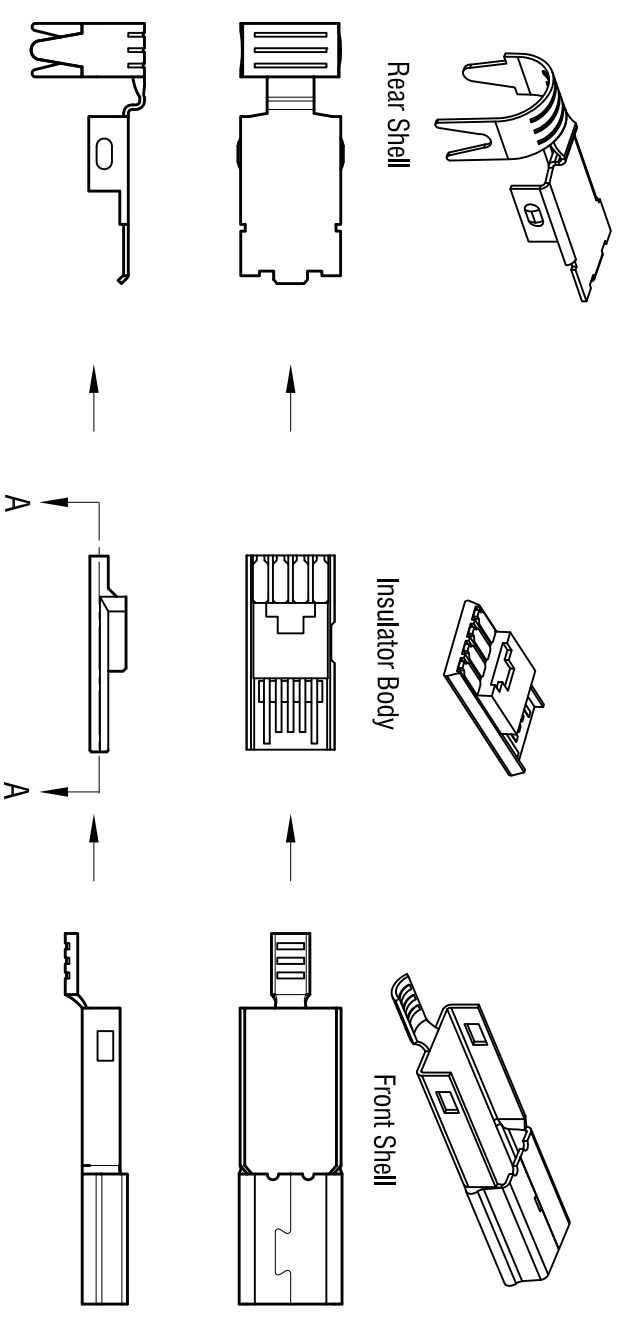


DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-072	A

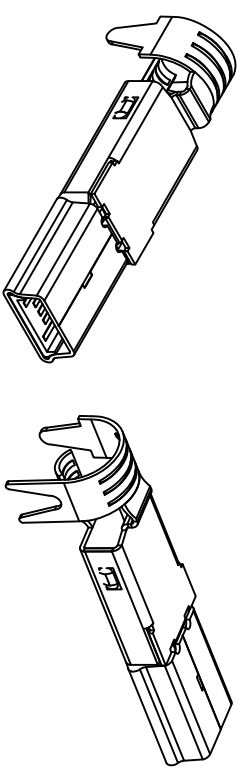

NOTE:
 SHELL: MAT'L- STEEL
 FINISH: TIN OVER NICKEL PLATING
 INSULATION: THERMOPLASTIC, UL 94V-0
 CONTACT: MAT'L- PHOSPHOR BRONZE
 FINISH: GOLD PLATE ON CONTACT AREA
 TIN OVER NICKEL ON SOLDER TAILS

ELECTRICAL CHARACTERISTICS:
 CONTACT RESISTANCE: 30m Ω max.
 INSULATION RESISTANCE: 1000 MEGA Ωmin.
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC

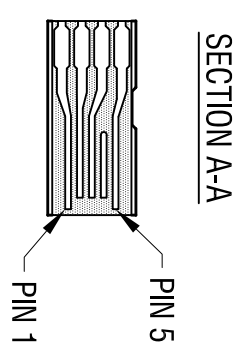

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.			
www.keystec.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			
USB MINI PLUG			
MATERIAL			
AS NOTED			
FINISH		DRN BY	
AS NOTED		BOONE	
TOLERANCES		DATE	
INCH	[MM]	7.17.06	
DECIMAL	± .015 [± 0.38]	SCALE	
ANGULAR	± 1°	2X	
UNLESS OTHERWISE SPECIFIED		CODE	DWG NO.
		C/M	935