DATE	DESCRIPTION	REV.

Notes:

Front Shell: Brass, Nickel Plate.
Rear Shell: Steel, Nickel Plate.

Insulator: Mat'l: Thermoplastic
UL 94V-0

Contacts: Mat'l: Phosphor Bronze
Finish: Gold Plate over
Nickel Plate on
Contact Area.
Tin Plate over
Nickel Plate
on Solder Tail.

Electrical Specifications
Rated Voltage:
30V AC (rms)

Contact Current Rating:
1A Max.

Contact Resistance:
30 milliohms Max.

Dielectric Withstanding:
500V AC

Operating Temperature:
-20°C to 85°C

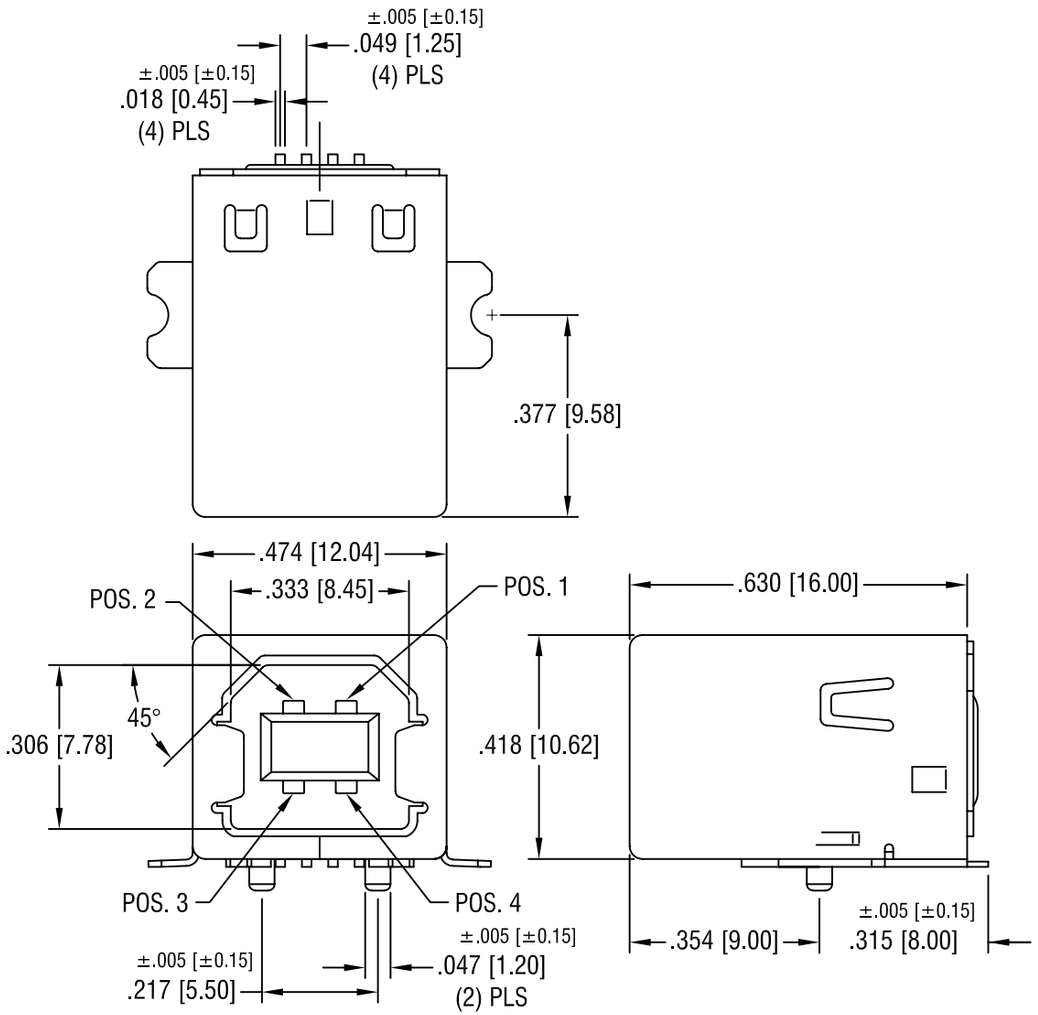

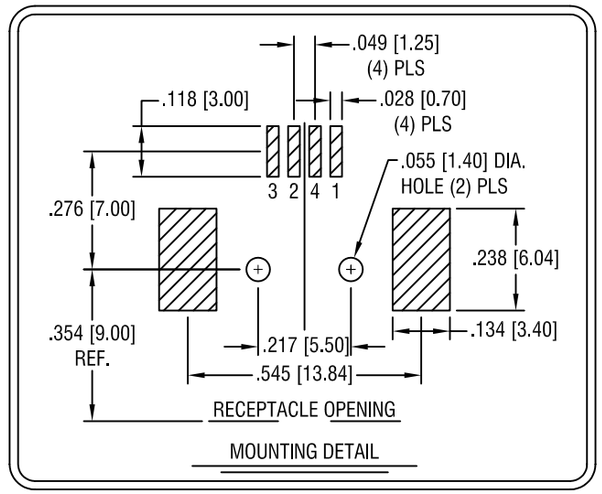

KEYSTONE ELECTRONICS CORP.
ASTORIA, N.Y. 11105-2017

PART NAME: USB B-TYPE HORIZONTAL SMT SOCKET			
MATERIAL: AS NOTED			
FINISH: AS NOTED	DRN BY: BOONE	DATE: 5.30.06	
	APP'D: LN	SCALE: 3X	
TOLERANCES: INCH [MM]; DECIMAL ± .010 [± 0.25]; ANGULAR ± 1°; UNLESS OTHERWISE SPECIFIED	CODE: C/M	DWG NO.: 933	

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.